




FREEDOM BINDLINE

Smartest High Speed Perfect Binding Line



Bindwel series of perfect binding line with freedom of posssibilities.

- Freedom 5000 with inline gathering and trimming
- Signa gatherer (straight or 90 degree)
- Inline trimmer (Trimit 30 C or Trimit 50 C)

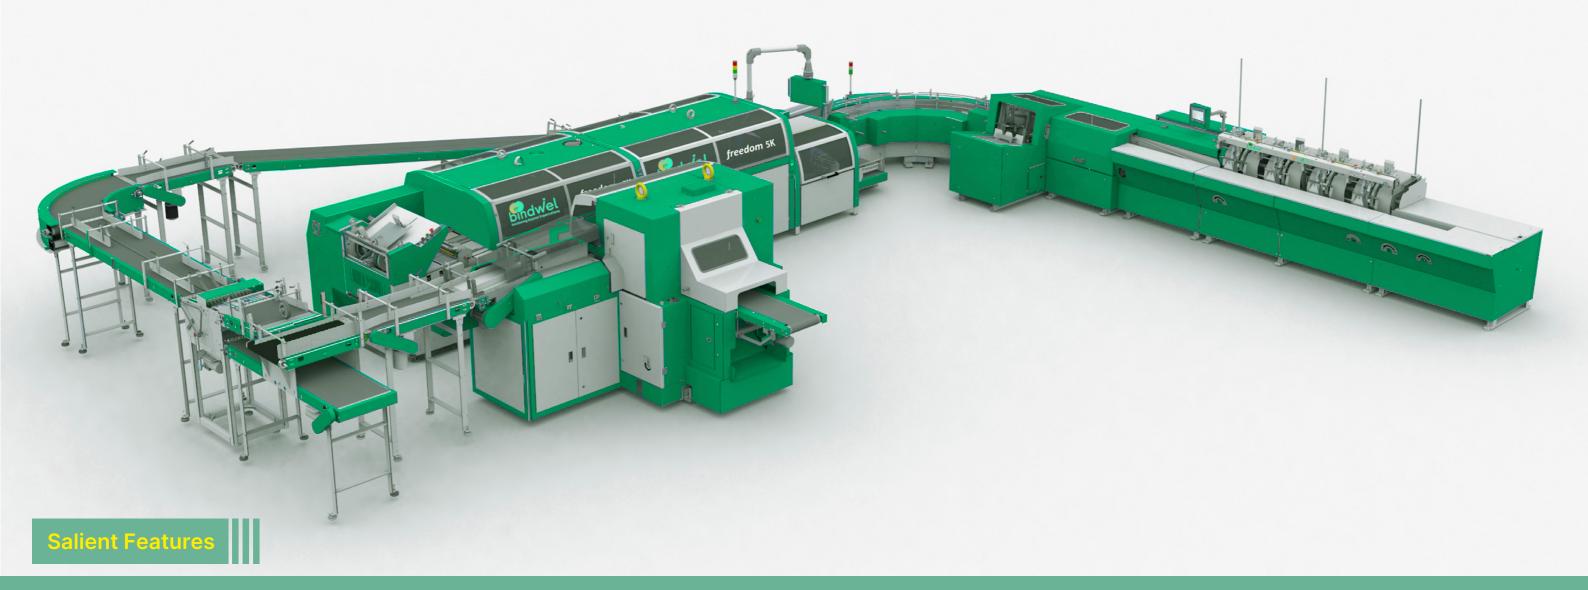

SIGNA > 5K GATHERER

- 4-20 stations configuration
- Sturdy design incorporating safety features
- Spine length: 140 -420 mm
- Book width: 110-300 mm
- Spine thickness: 3 50 mm
- Mechanical speed: offline 4000 BPH; inline 5000 BPH
- 40-250 GSM (single sheet depending on paper gsm & porosity)
- Required Controls and Electricals
- Stacker / delivery after Gathering
- Error detection protocols, handfed station
- Control system with HMI providing all information on settings, speed, production data, stoppage and maintenance warnings.
- Optional 90 Deg turn to infeed of binder.

INFEED TO BINDER

- 12 coated clamps with centralised adjustment
- Milling station for spine preparation
- Hotmelt spine gluing unit, on castors with two application rollers with heated spinner. Head and tail cut off system
- Integrated premelter with main glue tank
- Hotmelt side gluing unit on castor wheels
- Rotary cover feeder with pulsed compressed air
- Scoring station with 2 and 4 scores and divided scoring tools
- Cover aligning and pressing station
- Downhill lay down delivery
- Control system with HMI providing all information on settings, speed, production data, stoppage and maintenance warnings.

CONVEYOR TO TRIMMER

• Custom built as per customer requirement.

TRIMIT > 50C INLINE TRIMMER

- Sturdy, rugged and long life structure
- Automatic, high speed three knife trimmer, following stringent safety standards
- Incorporates international safety standards
- Touch panel with all error indications.
- Automatic Silicone Sprayer improves the life of side knives.
- Control system with wide screen HMI providing all information on settings, speed, production data, stoppage and maintenance warnings.
- Forced air pressure to remove trimmed waste from trimming bed
- No Book No Cut System
- Optional spiral cooling conveyor

OPTIONAL

- Automatic version of Freedom 5K (with fully these features) automatic book set-up from HMI)
- Book Block Feeder (for automatic feeding

- of sewn / stitched book blocks)
- PUR Gluing with Roller or Slot-Die applicator (Nordson®)
- BSRS Camera System for Signa Gathering Machine
- Side Stitching attatchment with stitching heads from hohner® Germany

(Note - A typical BindLine configuration involving various connecting elements like Signa Gatherer, Freedom Binder and Trimit trimmers, has many elements in addition to conveyors, to make all the machines work in sync to provide the optimal quality and productivity. The machines, when bought individually will not include these hardware and software components. However, the individual machines can be upgraded with these features)

Technical Data	
Gathering Stations	4 - 20
Number of Clamps	12
Maximum Book Size	420 mm x 300 mm (direct clamp feeding) 420 mm x 150 mm (Conveyor feeding)
Minimum Book Size	140 mm x 110 mm
Book Spine Thickness	3 mm to 50 mm

Technical Data	
Maximum Cover Size	420 mm x 650 mm
Minimum Cover Size	140 mm x 220 mm
Mechanical Speed	1500 to 5000 cycles per hour
Electrical Supply	415V/3 Phase/50 Hz (40 kW)
Air Requirement (Dry Air)	75 CFM, 8 Bar (16 station configuration)



Impel Services Pvt. Ltd.

1303, Lodha Supremus, Opp. Saki Vihar Telephone Exchange, Saki Vihar Road, Powai, Mumbai-400 072, India. Tel: +91-22-2088 0284 / 0285 email: sales@bindwel.com web: www.bindwel.com

