SigLoch XE-CÜT PRO Xtend

Execute Bigger. Without Expanding Your Footprint.

The SigLoch XE-CÜT PRO Xtend redefines what a compact digital flatbed cutter can do. Designed for modern digital print bureaus, the XE-CÜT PRO Xtend delivers the power to finish 900 × 600 mm jobs (and beyond)—while retaining a compact 600 × 400 footprint machine. Through an intelligent extended table and two-step workflow, Xtend becomes the only cutter in its class that bridges everyday digital finishing with occasional large-format, high-value jobs.
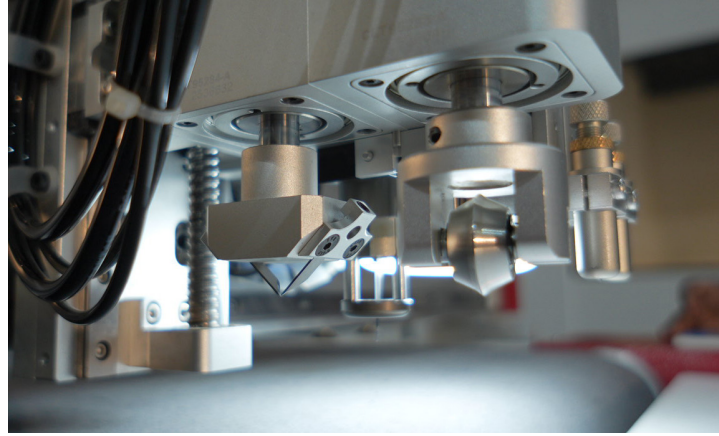
Where other systems force you to outsource, upgrade to a Larger machine (bigger bed size hence bigger footprint machine), or decline profitable work, XE-CÜT PRO Xtend lets you say YES—without investing in a bigger footprint or higher capital cost.

Do B2 / Double demmy - size work.

Without buying or accommodating a B2-size cutter.

Salient Features

- **Advanced XY Robotics:** Precision XY motion for intricate cuts, creases, and structural designs.
- **Wide Substrate Compatibility:** Handles materials from 120 GSM paper up to 6 mm thick substrates, supporting digital print, packaging samples, signage, and rigid boards.
- **Oscillating Knife & V-Groove as Standard:** Packaging-grade finishing capability in a compact digital table—ideal for box prototypes, carton samples, and rigid mock-ups.
- **High-Speed, High-Accuracy Performance:** Linear speeds up to 1200 mm/s with ±0.1 mm repeat accuracy for fast turnaround and repeatable results.
- **Smart Auto-Feeding with QR-Based Job Setup:** Vacuum feed with intelligent sheet separation and QR code reading for rapid changeovers and reduced setup errors.
- **Compact Footprint, Production-Grade Build:** Rigid single-chassis construction designed for space-constrained digital print environments without compromising stability and consistency.
- **Dongle-Free Open Software Platform:** Open, license-free software with easy reverse creasing and intuitive filepreparation for faster operator adoption.

Technical Data

Bed Size	600 mm x 400 mm
Linear Speed	1200 mm/s
Tools	Full Cut, Kiss-Cut, Creasing, Oscillating Knife, V-Groove
Maximum Thickness	Up to 6 mm (with V-Groove)
Minimum Thickness	120 GSM
Maximum Sheet Size	600 mm × 900 mm (Xtend workflow)
Minimum Sheet Size (Auto Feed)	210 mm x 297 mm
Repeat Accuracy	± 0.1 mm

Technical Data

Sheet separation	Air Powered Variable Jet Stream Separation
Feeding Mechanism	Vacuum Feed with Clamps Mounted on Gantry (Auto Feed)
Pile Height (Feeding)	Up to 150 mm
Power Consumption	4 kw
Registration System	Camera with Motion Control System
Connectivity	LAN
File Formats Supported	PLT, DXF, DST, DSB, PDF, CUT, NC, PTS, Vcut
Dimensions	2200 mm (L) × 900 mm (W) × 1200 mm (H)